




Maevi Panic Button

Quick Start Guide

Introduction

Maevi Panic Button is used to send a panic alarm to Maevi app by simply pressing the button on the controller. This device can trigger Maevi Siren with one click.

Get to know your device

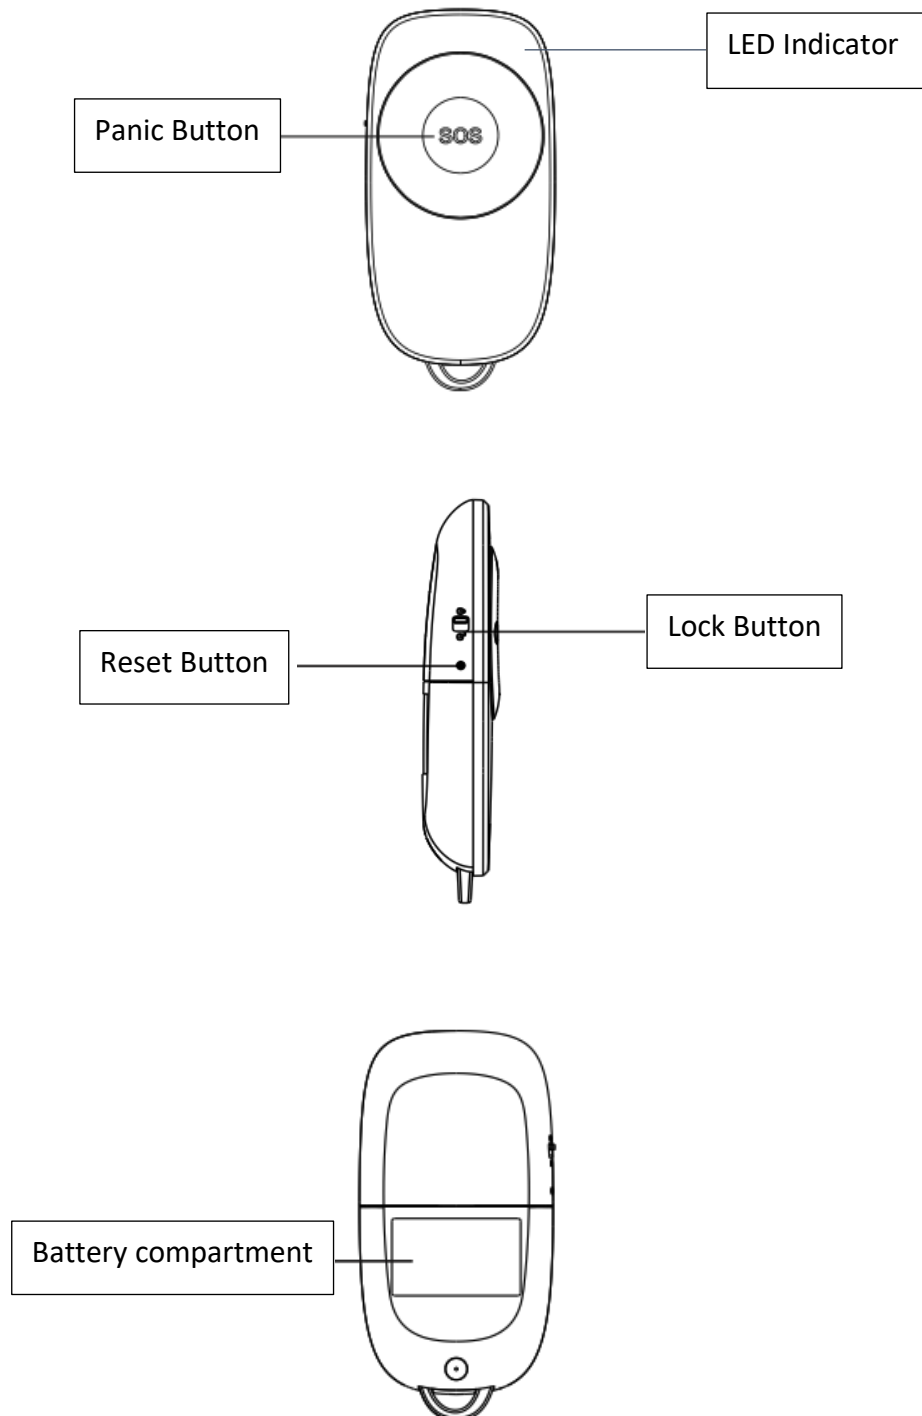

Buttons

Panic Button	<ul style="list-style-type: none"> • Send Alarm. Press to send the panic alarm to the mobile app.
Lock Button	<ul style="list-style-type: none"> • You can lock/unlock the panic button by switching the side lock (you cannot use the panic button when its locked).
Reset Button	<ul style="list-style-type: none"> • Set the device in pairing mode to join the Zigbee network • Return the device to default factory settings

Led Indicator

LED Status	What it means
Red LED flashes three times	The device is prepared to join a network (when you press the reset button once)
Green LED flashes three times	The device has successfully joined a network
Green LED flash	The device leaves the network (when you press and hold the reset button to return it to default factory settings)

Get Started

To get started, you will need :


- Maevi Gateway
- Maevi Panic Button
- Maevi Mobile App
(Available for download on Google Play Store and Apple App Store)

Then follow the steps below:

1. Power on the panic button. Press the reset button once and the LED indicator will flash red three times indicating the panic button is ready to join a network.

Tips: If there is no battery inside, please insert a CR2450 battery.


2. Open Maevi App and go to “Home Security” tab.
3. Select the “Sensor” tab.
4. Select the “Add New Device” button to pair the Panic Button with the Gateway.

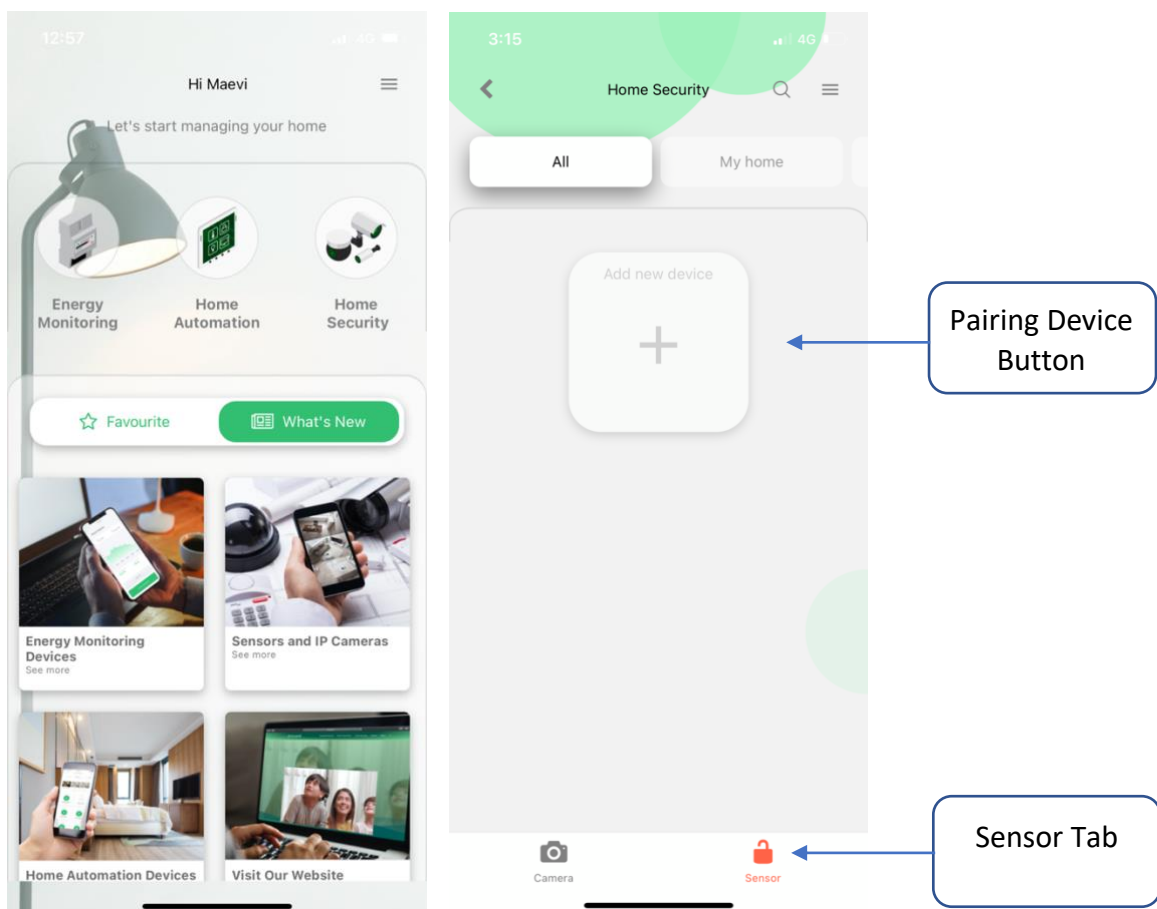

Tips: You can also press and hold the “Z” button on the Gateway for two seconds until the LED indicator turns steady blue.


5. Select Gateway, now the Gateway will start searching for new devices to be paired with.
6. The Panic Button will join the gateway's network automatically. The LED indicator will flash green three times when pairing is successful.
7. The Panic Button should now appear in the app as SOS Button. If not, refresh the "Home Security" page by pull it down and release.
8. Now you can use the Panic Button in your system.

Features

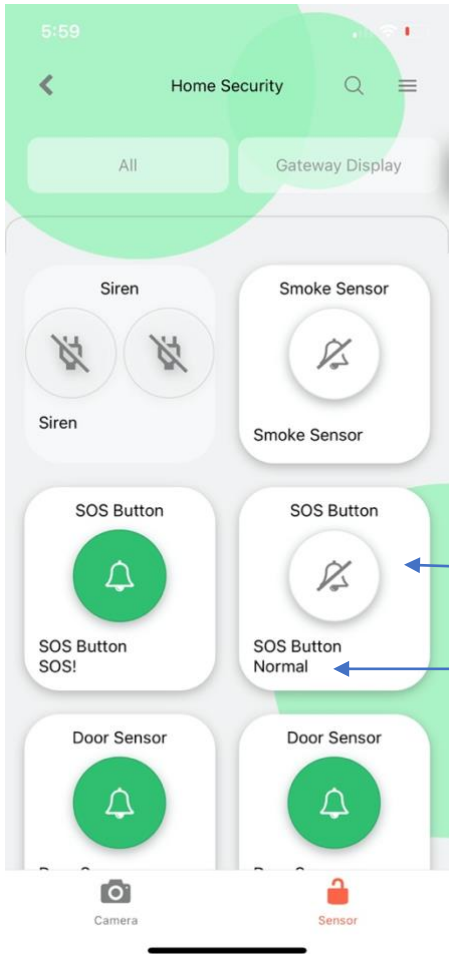


Notification ON/OFF

Status Device

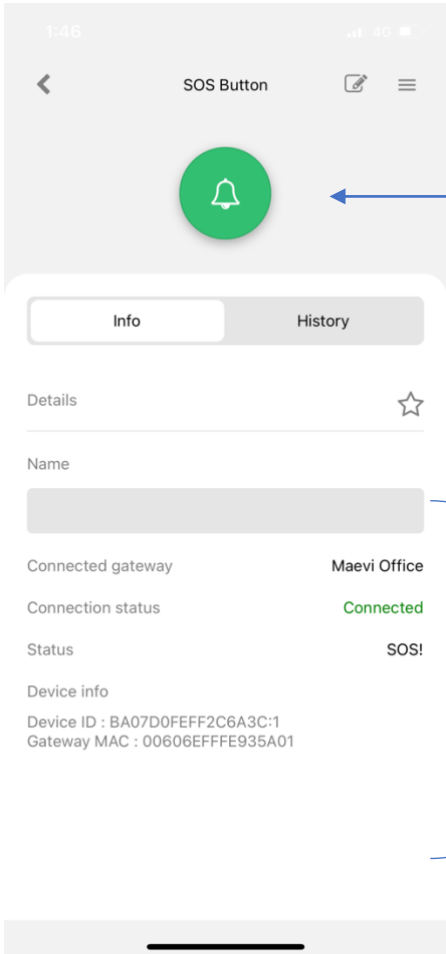

Notification ON/OFF

Device Status/ Info

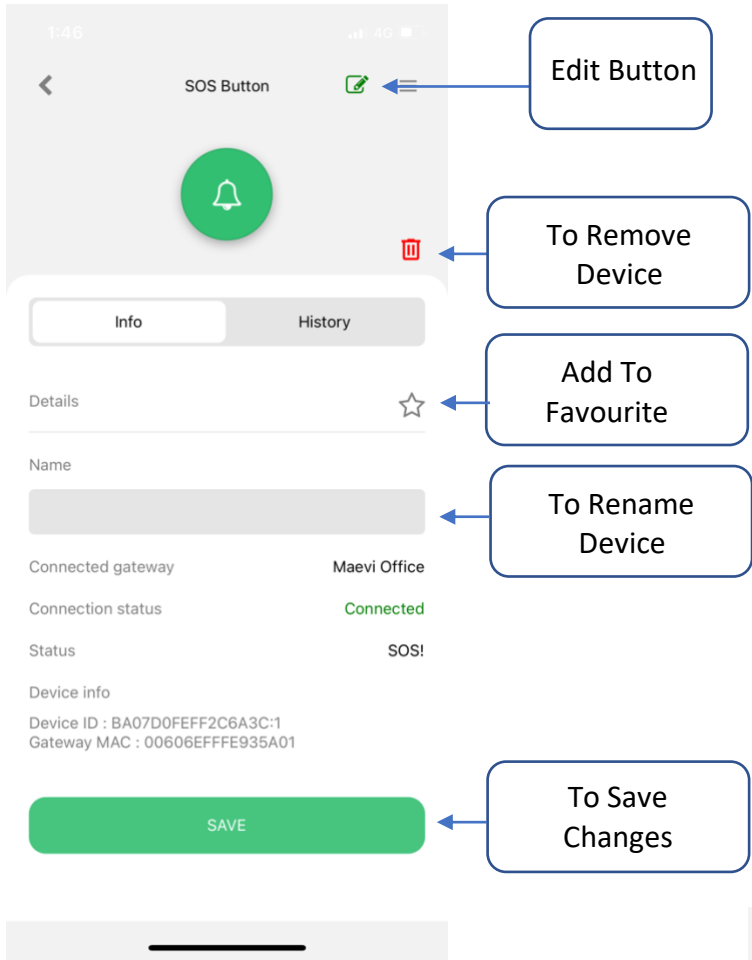

Edit Button

To Remove Device

Add To Favourite

To Rename Device

To Save Changes

1:46 4G

SOS Button

Info History

Details

Name

Connected gateway **Maevi Office**

Connection status **Connected**


Status **SOS!**

Device info

Device ID : BA07D0FEFF2C6A3C:1

Gateway MAC : 00606EFFFFE935A01

SAVE

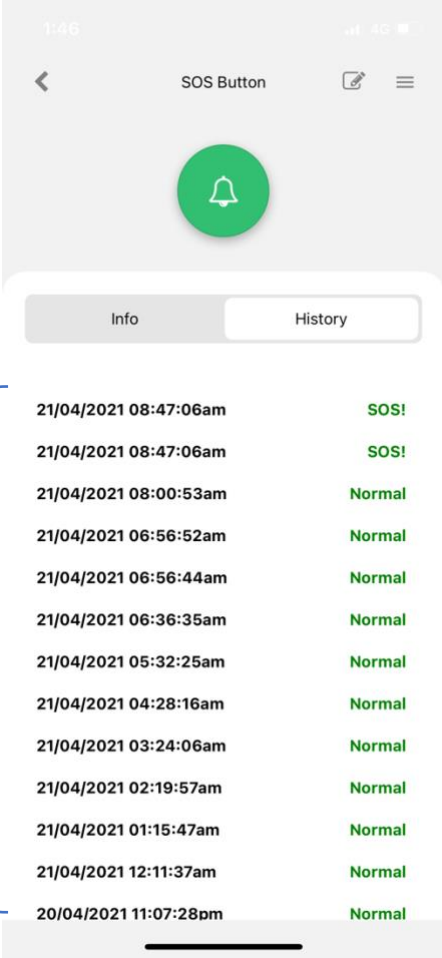

1:46 4G


SOS Button

Info History

Activity Log

21/04/2021 08:47:06am	SOS!
21/04/2021 08:47:06am	SOS!
21/04/2021 08:00:53am	Normal
21/04/2021 06:56:52am	Normal
21/04/2021 06:56:44am	Normal
21/04/2021 06:36:35am	Normal
21/04/2021 05:32:25am	Normal
21/04/2021 04:28:16am	Normal
21/04/2021 03:24:06am	Normal
21/04/2021 02:19:57am	Normal
21/04/2021 01:15:47am	Normal
21/04/2021 12:11:37am	Normal
20/04/2021 11:07:28pm	Normal

Reset Panic Button

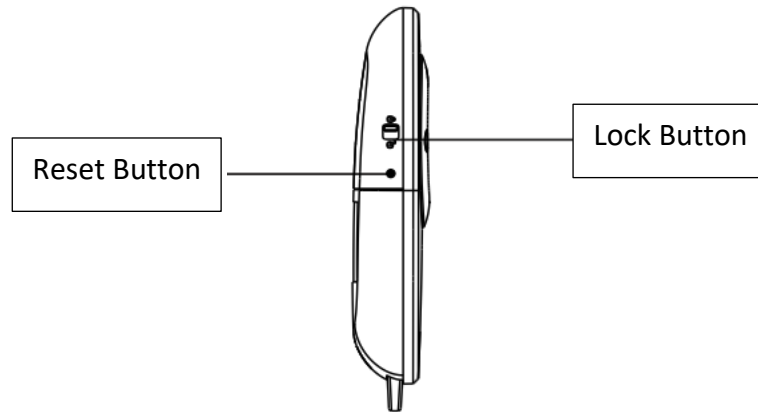

Steps:

1. Press and hold the reset button for ten seconds until the LED indicator flash green once.
2. Now, Panic Button is returned to the default factory setting.